



MECAPLUS

Aerial platform

Mecaplús, S.L.
Torre del Catalán s/n
22535 Esplús - Huesca - España
Tel. +34 618 122 408
administracion@mecaplus.es
www.mecaplus.es

AERIAL PLATFORM P12 ECO



WWW.MECAPLUS.ES

Standars features


- Self-propelled
- Tilt alarm
- Boom managed by foot controls
- Hydrostatic transmission with geared motors
- Independent hydraulic circuits
- Possibility to perform up to 3 movements simultaneously
- All the conductions inside the arms
- Manual accelerator
- Object holder box
- Easy transport
- Hour meter
- 12V-60 A starter battery
- Negative brake incorporated in reducers
- Oscillating front axle with automatic locking
- Control of movements in base and basket
- Easy access to all machine components
- Automatic motor stop control for lack of oil or excess temperature
- Emergency stop from the base of the platform and from the working basket
- Automatic differential lock
- Rescue system

Options

- Four-wheel drive, 4x4
- Pneumatic equipment of 520 l/min.
- Towable
- Paint color
- 12V working lights in basket
- Massive wheels
- Rear wheels with tracks
- 220V electric generator with electric socket in basket
- Two-person basket 1'4x0'6 m.
- Machine connected to Industry 4.0

Dynamic self-leveling system:

Cross axis $20^\circ = 36\%$ slope
 Longitudinal axis $15^\circ = 26\%$ slope

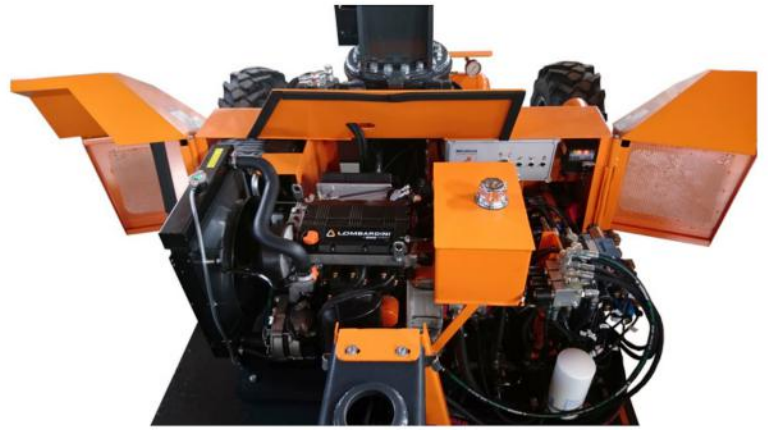

Specifications

Working height:	12M
Folded length:	5'65M
Folded height:	2'30M
Width:	2'00M
Wheels:	10.0/75-15.3
Weight:	2.500KG
Maximum weight in basket:	120KG
Basket size (1 pers.):	0,6 x 0,6M
Working outreach:	5'20M
Turntable rotation:	346°
Max. slope of cross axis:	8° / 14%
Max. slope of longitudinal axis:	10° / 18%
Gradeability 2x4 / 4x4 :	30% / 45 %
Motor:	KOHLER KDW1003

